

RECREATION

gerflor.ru
gerflor.com



Gerflor[®]
theflooringgroup


All Gerflor experience for a highly performing recreational floor: environmental friendly, low VOC, no solvent, no heavy metal and 100% recyclable suitable for leisure and sports activities.

RECREATION 30

 2 m	 PUR Protect®	 100 % recyclable
--	--	--



6252 Pepper

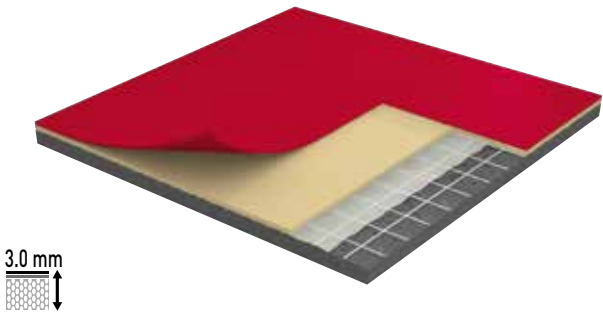


RECREATION 45

 1,50 m	 PUR Protect®	 100 % recyclable
---	--	--



6556 Verde

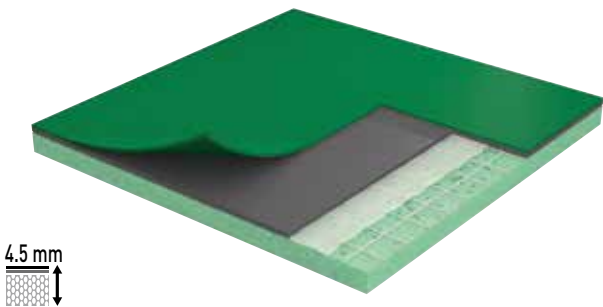


RECREATION 60

 1,50 m	 PUR Protect®	 100 % recyclable
---	--	--



2402 Azul

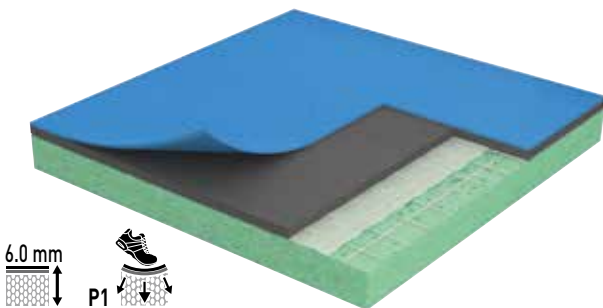



6062 Canadian Maple - REC 45 / REC 60



6058 American Oak - REC 45 / REC 60



6046 Brown Wood - REC 30



6045 Golden Wood - REC 30



6047 Classic Wood - REC 30



2407 Sky Blue - REC 30




6160 Naranja - REC 45 / REC 60




6556 Verde - REC 45 / REC 60 - REC 30*



6252 Pepper - REC 30 - REC 45 / REC 60*

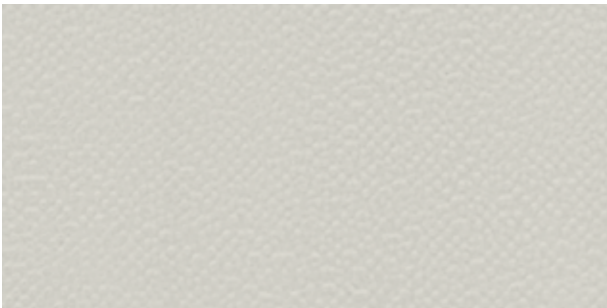


6790 Fog - REC 30

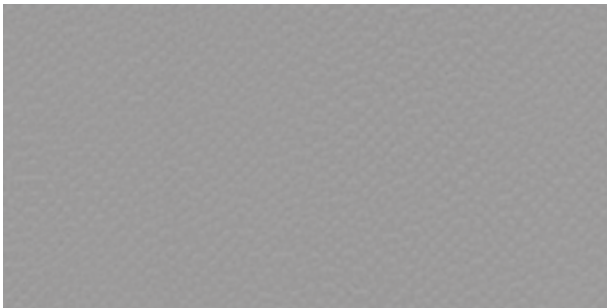

2707 Storm - REC 30




2402 Azul - REC 45 / REC 60

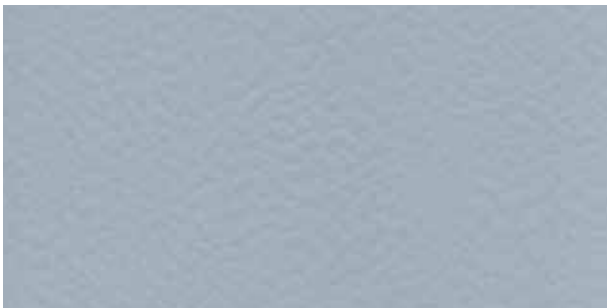

2711 Gris - REC 45 / REC 60



6614 Oceano - REC 60

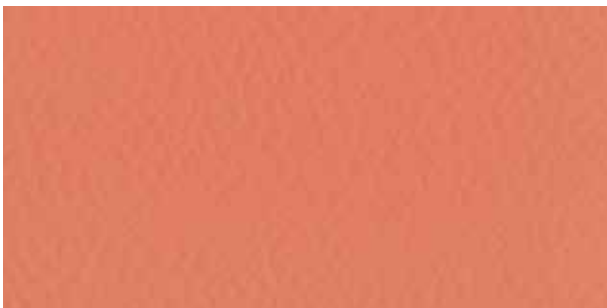

6157 Rosa - REC 60

* On demand



	RECREATION 30			RECREATION 45 /60			
PRODUCT DESCRIPTION / ОПИСАНИЕ	Standard / Стандарт	Requirement / Требование	Units / Единицы	WOOD DESIGNS / Деревянные дизайны	SOLID COLOURS / Однотонные цвета	RECREATION 45	RECREATION 60
Surface treatment / Обработка поверхности	-	-	-	PUR PROTECT	PUR PROTECT	PUR PROTECT	PUR PROTECT
Surface complex / Состав поверхности	-	-	-	100% PVC		100% PVC	
Foam / Вспененная подложка	-	-	-	VHD	VHD	Closed cell foam / Упорядоченная структура ячеек	
Thickness / Толщина	EN 428	-	mm	3.2	3	4.5	6.0
Weight / Вес	EN 430	-	kg/m²	2.9	2.3	2.6	3.7
Length / Длина	EN 426	-	lm	25Max	25Max	20.5	20.5
Width / Ширина	EN 426	-	lm	2	2	1.5	1.5

SPORT PROPERTIES / СПОРТИВНЫЕ ХАРАКТЕРИСТИКИ

Shock absorption / Амортизация ударов	EN 14808	≥ 25	%	-	-	≤ 25	≥ 25
Vertical deformation / Вертикальная деформация	EN 14809	≤ 3.5	mm	-	-	≤ 3.5	≤ 3.5
Sliding coefficient / Коэффициент скольжения	EN 13036-4	80 - 110	-	80 - 110	80 - 110	80 - 110	80 - 110
Ball bounce / Отскок мяча	EN 12235	≥ 90	%	≥ 90	≥ 90	≥ 90	≥ 90

TECHNICAL CHARACTERISTICS / ЭКСПЛУАТАЦИОННЫЕ ХАРАКТЕРИСТИКИ

Abrasion resistance / Износостойкость	EN ISO 5470-1	≤ 1000	mg	≤ 350	≤ 350	≤ 350	≤ 350
Impact resistance / Ударопрочность	EN 1517	≥ 8	N/m	≥ 8	≥ 8	≥ 8	≥ 8
Indentation resistance / Остаточные впадины	EN 1516	≤ 0.5	mm	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5

CLASSIFICATION / КЛАССИФИКАЦИЯ

Fire / Огнестойкость	EN 13501-1	-	-	Bfl-s1	Cfl-s1	Cfl-s1	Cfl-s1
----------------------	------------	---	---	--------	--------	--------	--------



Health
& Safety



ISO 14001



Recycling



LCA
Life Cycle
Analysis



Committed to sustainable development

RUSSIA: Gerflor Moscow Office
Tel: + 7 495 785 23 71
e-mail: gerflorrussia@gerflor.ru

Gerflor Be CONNECTED!



