


TARALAY IMPRESSION & UNI

gerflor.com



Gerflor[®]
theflooringroup

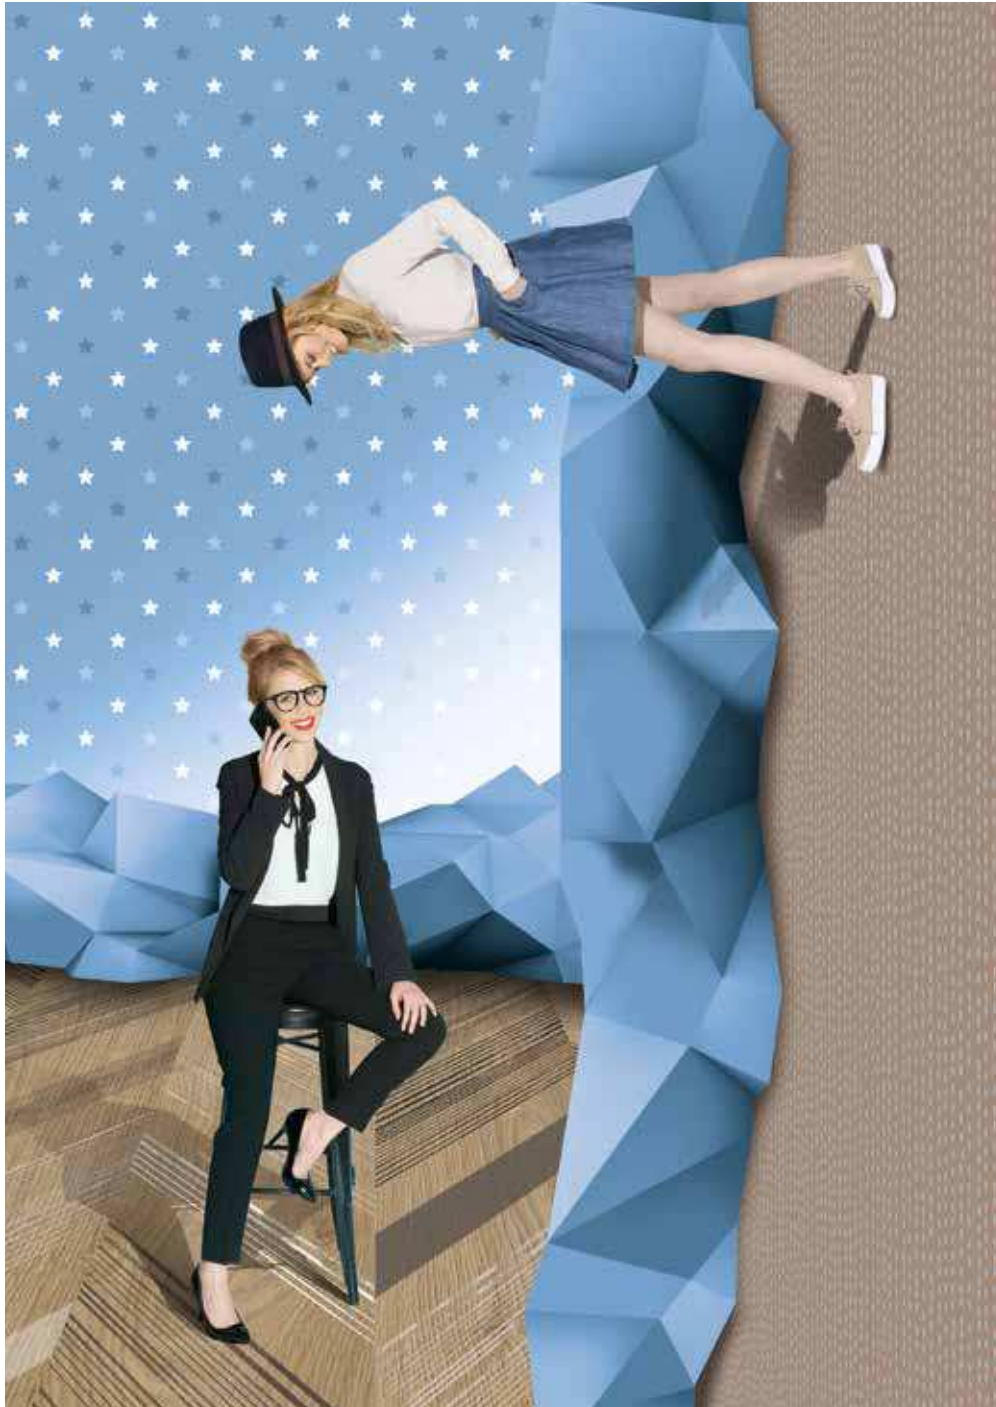




TARALAY IMPRESSION



0373 - Noma Ice




0723 - Charme Pecan




0719 - Infinity Lichen



0068 - Renzo Pecan



0025 - Renzo Taupe



0726 - Sycamore Dark



16.6 cm

0519 - Noma Beige



16.6 cm

No strip
Continuous
design

0680 - Infinity Greige



16.6 cm

No strip
Continuous
design

0725 - Sycamore Light Brown



16.6 cm

0773 - Portobello



16.6 cm

11.2 cm
14.2 cm
8.7 cm
6.4 cm

0734 - Loft Chestnut



16.6 cm

0371 - Noma Rustic



10 cm

1314 - Walnut brown

TARALAY IMPRESSION



0538 - Habana Vinales



0722 - Herringbone Blond



0522 - Habana Trinidad



0724 - Herringbone Chatain



0721 - Charme Natural



0528 - Walnut Cream




0720 - Infinity Aube



0727 - Sycamore Vanilla



0760 - Moon Island



0671 - Loft Light Brown

TARALAY IMPRESSION & UNI



0769 - Mohair White



0523 - Cemento Genova



0543 - Cemento Brescia



0767 - Mohair Natural



0524 - Cemento Capri



0766 - Mohair Dark



0525 - Cemento Modena




0770 - Gentlemen Clear



0771 - Gentlemen Grey



0772 - Gentlemen Coffee

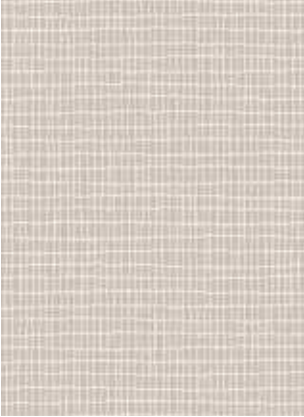


0774 - Trame Clear




0776 - Trame Beige



0777 - Trame Rose

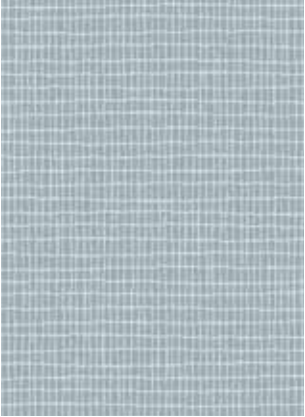


0775 - Trame Blue

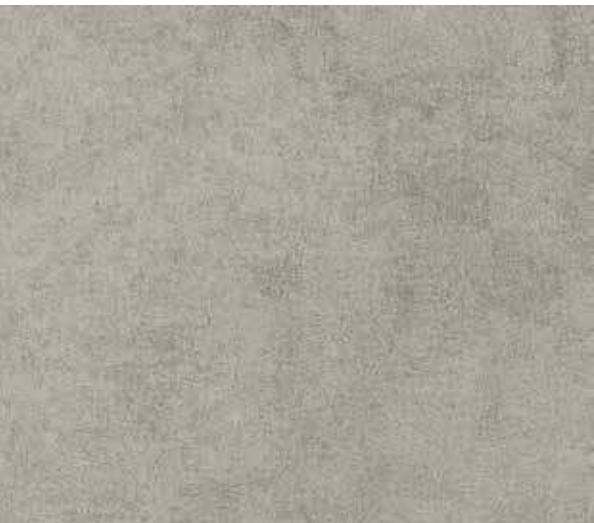


s Beige




6267 - Uni Beige

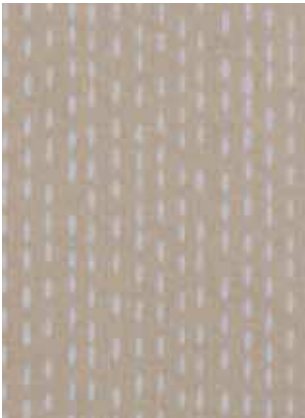

0736 - Rice Champagne

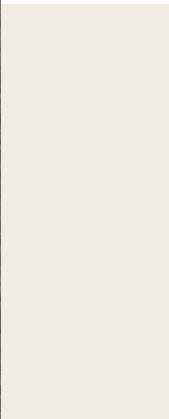

ite

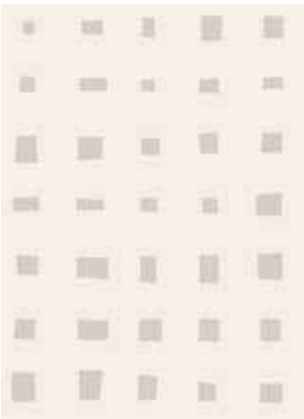

0755 - Kubes White



0763 - Rice Greige




0737 - Rice Souris



6271 - Uni Grey



0729 - Corner Metal

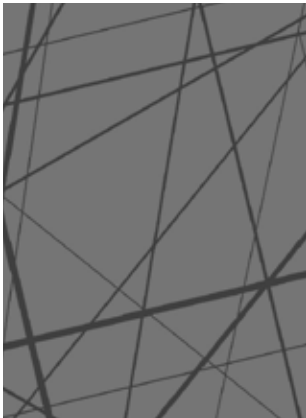

0746 - Nest Black



0778 - Uni Anthracite




0744 - Stars Anthracite


TARALAY IMPRESSION & UNI




0762 - Rice Brown



6265 - Uni Brown

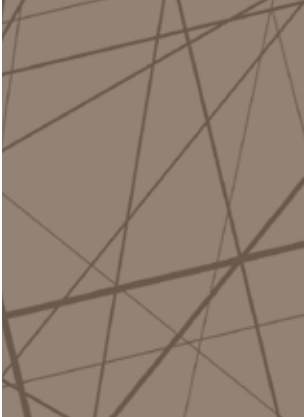

0765 - Nest Taupe

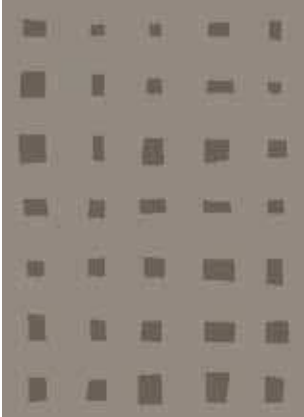


0751 - Kubes Taupe



0741 - Corner Tomette




6270 - Uni Tomette

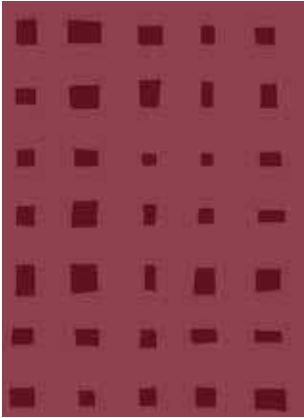


0748 - Kubes Burgundy




0757 - Rice Coquelicot

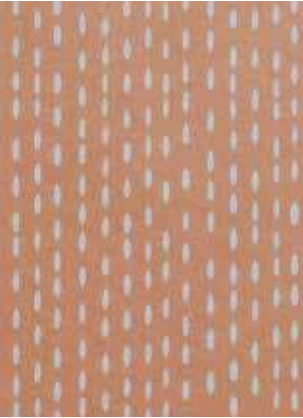

0738 - Rice Copper

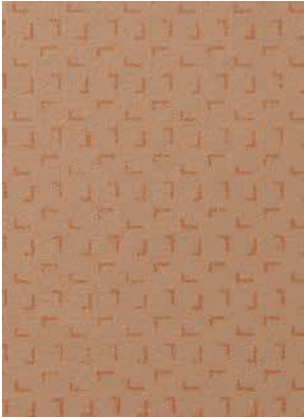

0733 - Corner Copper

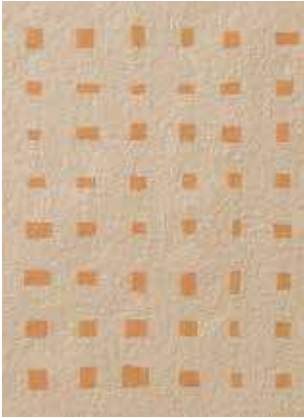

0752 - Kubes Gold



0759 - Rice Mustard



6268 - Uni Sun



0750 - Kubes Sun



6269 - Uni Orange



0764 - Stars Orange




0739 - Corner Anis



6263 - Uni Anis



0735 - Rice Light Green




6262 - Uni Turquoise



0740 - Corner Turquoise




0747 - Kubes Olive




6264 - Uni Olive



0758 - Rice Sea

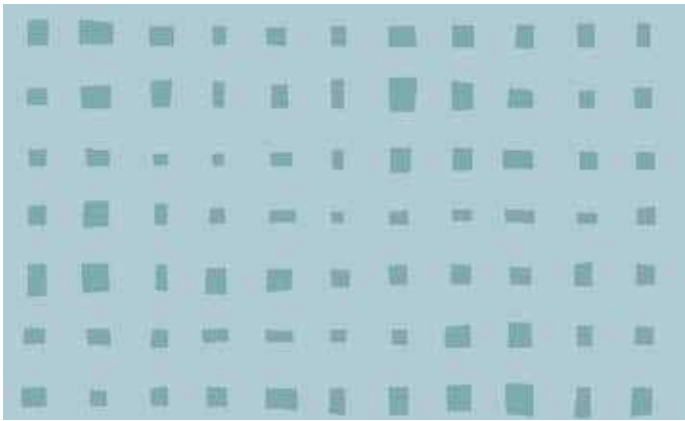


0749 - Kubes Sky

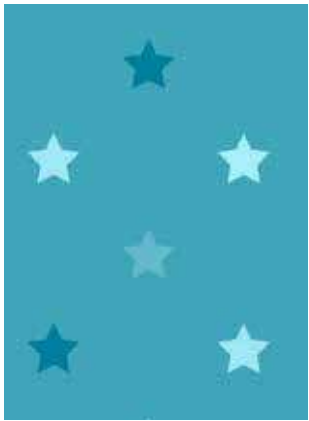


0743 - Stars Baltique




0754 - Kubes Blue



6261 - Uni Blue

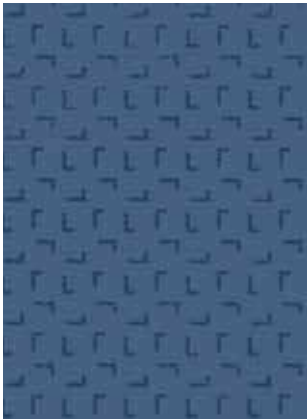

0732 - Corner Dark Blue



6260 - Uni Dark Blue

TARALAY IMPRESSION		TARALAY UNI
COMPACT	COMFORT	COMFORT
Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Uni

DESCRIPTION

Total thickness	EN ISO 24346 [EN 428]	mm	2.00	3.35	3.00
	ASTM F386-02	inch	0.08	0.13	0.1
Thickness of wearlayer	EN ISO 24340 [EN 429]	mm	0.70	0.65	0.65
	ASTM F410-02	inch	0.028	0.026	0.026
Weight	EN ISO 23997 [EN 430]	g/sq.m	2635	2825	2300
Width/length of sheet	EN ISO 24341 [EN 426]	cm / lm	200 / 25	200 / 25	200 / 25
	-	feet - inch	6'6" / 82'	6'6" / 82'	6'6" / 82'

CLASSIFICATION

Norm/product specification	-	-	EN ISO 10582 [EN 649]	EN 651	EN 651
European classification	EN ISO 10874 [EN 685]	class	34 - 43	34 - 42	34 - 42
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance wet: ramp test with oil ⁽¹⁾	DIN 51 130	class	R10	R10	R10

PERFORMANCES

Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T	T
Type binder content	EN ISO 10582	Type	I	-	-
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation [requirement]	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.20	≤ 0.20
Residual indentation [average measured value]	-	mm	≈ 0.03	≈ 0.08	≈ 0.11
Impact sound insulation	EN ISO 717-2	dB	8	19	17
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK	OK	OK
Thermal conductivity	EN ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Protecsol® 2	Protecsol® 2	Protecsol®
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK	OK	OK
Anti-bacterial activity [E. coli - S. aureus - MRSA] ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth

ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m³	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®

CE marking

	EN 14041	-			
		-			

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges
(2) The implementation of an effective cleaning regime is the best defence against infection

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Technical data sheets and product descriptions for **TARALAY IMPRESSION COMPACT and COMFORT PLUS** (0.9mm wearlayer) available in the Taralay Impression & Uni product guide.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/04/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

TARALAY IMPRESSION & UNI, LESS SPEAKING FOR MORE ACTIONS

COMPOSITION
100% REACH compliant

RECYCLABILITY
100 %

INDOOR AIR QUALITY
100 times lower than norm requirements (TVOC < 10ug/m³ after 28 days)

LCA
Eco-designed according to a product-specific life cycle analysis

WELLNESS
Anti slip R10
Comfort version:
Walking comfort <65dB (best certification) and impact sound insulation - 19 dB

Be **CONNECTED!**

www.gerflor.com